

# IFace303

Face & Fingerprint Time Attendance And Access Control Terminal

XIMI has released the IFace303 Multi-Biometric T&A and Access Control Terminal which supports 1500 face templates, 2,000 fingerprint templates and 10,000 cards (optional). It is equipped with XIMI latest hardware platform and algorithm, which provide clients with a brand new UI and user-friendly operating interface, bringing them a smooth using experience. With the advanced face algorithm and multi-biometric verification technology, the terminal's security level of verification is greatly enhanced

#### Features

- 1500 face and 2,000 fingerprint templates
- Multi-languages
- High verification speed
- Advanced and user-friendly UI
- Chip encryption for firmware protection
- Optional built-in battery backup providing approximately 4 hours of continuous operation
- Easy to extend functions and customize client's requirements
- One face template is registered for one user only
- Able to detect whether the face is an actual face or a photo,
- enhancing the security level of verification


# Specifacations

Face Capacity1,500Fingerprint Capacity2,000Transaction Capacity100,000CommunicationTCP/IP, RS232/485USB HostTwoAlgorithm VersionZK Face 7.0 & ZK Finger 10.0Display4.3" TFT touch screen2000mAh backup batteryOptionalTime Attendance Standard FunctionsID Card(Optional), Automatic Status Switch, Self-Service Query,Work Code, T9 input, 9 digit user ID, DLSTAccess control interfaces for3rd party electric lock, door sensor, exit buttonWiegand SignalOutputOptional FunctionsSerial printer, Mifare card, Extendable Scheduled-bell, Short Massage, Web-server, WIFI, GPRSPower SupplyDC 12V 3A		
Transaction Capacity100,000CommunicationTCP/IP, RS232/485USB HostTwoAlgorithm VersionZK Face 7.0 & ZK Finger 10.0Display4.3" TFT touch screen2000mAh backup batteryOptionalTime Attendance Standard FunctionsID Card(Optional), Automatic Status Switch, Self-Service Query,Work Code, T9 input, 9 digit user ID, DLSTAccess control interfaces for3rd party electric lock, door sensor, exit buttonWiegand SignalOutputOptional FunctionsSerial printer, Mifare card, Extendable Scheduled-bell, Short Massage, Web-server, WIFI, GPRSPower SupplyDC 12V 3A	Face Capacity	1,500
CommunicationTCP/IP, RS232/485USB HostTwoAlgorithm VersionZK Face 7.0 & ZK Finger 10.0Display4.3" TFT touch screen2000mAh backup batteryOptionalTime Attendance Standard FunctionsID Card(Optional), Automatic Status Switch, Self-Service Query,Work Code, T9 input, 9 digit user ID, DLSTAccess control interfaces for3rd party electric lock, door sensor, exit buttonWiegand SignalOutputOptional FunctionsSerial printer, Mifare card, Extendable Scheduled-bell, Short Massage, Web-server, WIFI, GPRSPower SupplyDC 12V 3A	Fingerprint Capacity	2,000
USB HostTwoAlgorithm VersionZK Face 7.0 & ZK Finger 10.0Display4.3" TFT touch screen2000mAh backup batteryOptionalTime Attendance Standard FunctionsID Card(Optional), Automatic Status Switch, Self-Service Query,Work Code, T9 input, 9 digit user ID, DLSTAccess control interfaces for3rd party electric lock, door sensor, exit buttonWiegand SignalOutputOptional FunctionsSerial printer, Mifare card, Extendable Scheduled-bell, Short Massage, Web-server, WIFI, GPRSPower SupplyDC 12V 3A	Transaction Capacity	100,000
Algorithm VersionZK Face 7.0 & ZK Finger 10.0Display4.3" TFT touch screen2000mAh backup batteryOptionalTime Attendance Standard FunctionsID Card(Optional), Automatic Status Switch, Self-Service Query,Work Code, T9 input, 9 digit user ID, DLSTAccess control interfaces for3rd party electric lock, door sensor, exit buttonWiegand SignalOutputOptional FunctionsSerial printer, Mifare card, Extendable Scheduled-bell, Short Massage, Web-server, WIFI, GPRSPower SupplyDC 12V 3A	Communication	TCP/IP, RS232/485
Display4.3" TFT touch screen2000mAh backup batteryOptionalTime Attendance Standard FunctionsID Card(Optional), Automatic Status Switch, Self-Service Query,Work Code, T9 input, 9 digit user ID, DLSTAccess control interfaces for3rd party electric lock, door sensor, exit buttonWiegand SignalOutputOptional FunctionsSerial printer, Mifare card, Extendable Scheduled-bell, Short Massage, Web-server, WIFI, GPRSPower SupplyDC 12V 3A	USB Host	Тwo
2000mAh backup batteryOptionalTime Attendance Standard FunctionsID Card(Optional), Automatic Status Switch, Self-Service Query,Work Code, T9 input, 9 digit user ID, DLSTAccess control interfaces for3rd party electric lock, door sensor, exit buttonWiegand SignalOutputOptional FunctionsSerial printer, Mifare card, Extendable Scheduled-bell, Short Massage, Web-server, WIFI, GPRSPower SupplyDC 12V 3A	Algorithm Version	ZK Face 7.0 & ZK Finger 10.0
Time Attendance Standard FunctionsID Card(Optional), Automatic Status Switch, Self-Service Query,Work Code, T9 input, 9 digit user ID, DLSTAccess control interfaces for Wiegand Signal3rd party electric lock, door sensor, exit buttonOptional FunctionsSerial printer, Mifare card, Extendable Scheduled-bell, Short Massage, Web-server, WIFI, GPRSPower SupplyDC 12V 3A	Display	4.3" TFT touch screen
Query,Work Code, T9 input, 9 digit user ID, DLST     Access control interfaces for   3rd party electric lock, door sensor, exit button     Wiegand Signal   Output     Optional Functions   Serial printer, Mifare card, Extendable Scheduled-bell, Short Massage, Web-server, WIFI, GPRS     Power Supply   DC 12V 3A	2000mAh backup battery	Optional
Wiegand Signal   Output     Optional Functions   Serial printer, Mifare card, Extendable Scheduled-bell, Short     Massage, Web-server, WIFI, GPRS   DC 12V 3A	Time Attendance Standard Functions	
Optional Functions     Serial printer, Mifare card, Extendable Scheduled-bell, Short Massage, Web-server, WIFI, GPRS       Power Supply     DC 12V 3A	Access control interfaces for	3rd party electric lock, door sensor, exit button
Massage, Web-server, WIFI, GPRS   Power Supply DC 12V 3A	Wiegand Signal	Output
	Optional Functions	•
	Power Supply	DC 12V 3A
Operating remperature 0 C ~ 45 C	Operating Temperature	0°C ~ 45°C
Operating Humidity 20% ~ 80%	Operating Humidity	20% ~ 80%
Dimension(L×W×H) 193.6mm×146.8mm×111mm	Dimension(L×W×H)	193.6mm×146.8mm×111mm
Gross Weight 1.9Kg	Gross Weight	1.9Кg

### Configuration

# 

## What's in the Box

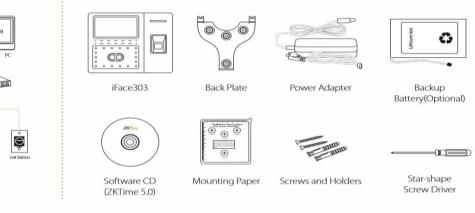

#### XIMITECH

XIMITECH,F1004, Tiongong Security Minzhi Street,Longhua District Shenzhen,Guangdong,China Tel:86 755 61902989 Email:sales@ximitechnology.com Skype: vicky.wen111 Web: www.ximitechnology.com www.ximitech.en.alibaba.com © Copyright 2016. XIMITech Inc. XIMITeco Logo is a registered trademark of XIMITeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved



